

GUTTER BRACKET SELECTION




Selection of brackets for use with ZINCALUME® rainwater goods.

Both Galvanised steel and ZINCALUME® material can be used for brackets for ZINCALUME® rainwater goods. Galvanised steel is compatible with ZINCALUME® products and any inert catchment effect from ZINCALUME® roofing (or COLORSTEEL® products) on gutter brackets is insignificant.

Care should be taken when selecting the coating weight of plain galvanised feed, to ensure equivalent durability with the ZINCALUME® rainwater goods, and for this reason a galvanised coating weight of 450g/m² (Z450) is recommended.

COLORSTEEL® products can similarly be used for gutter brackets, however, for internal brackets it is recommended that thicknesses of prepainted steel less than 1.2mm are used. Where internal brackets of 1.2mm or greater thicknesses are required, plain Z450 galvanised steel or hot dipped galvanised steel brackets should be used.

If required, plain galvanised or ZINCALUME® gutter brackets can be post painted or powder coated, and in such a condition are not governed by the 1.2mm gauge restriction.

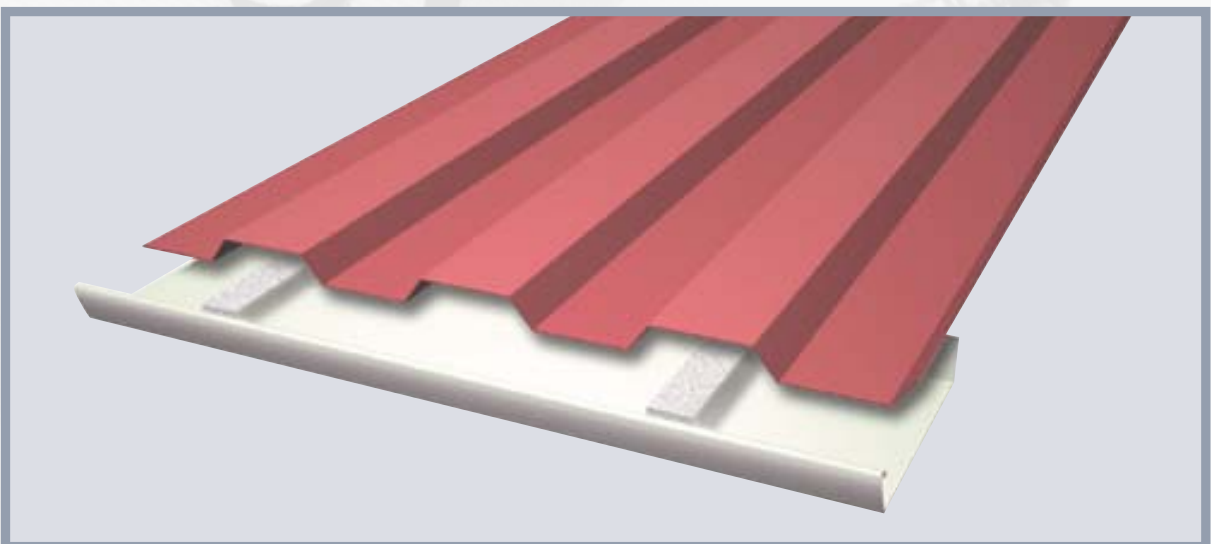

If practical, internal gutter brackets should be positioned under the crests of the profile.

FURTHER INFORMATION

For additional information, literature or technical assistance, please contact:

Roofing and Cladding Sector
New Zealand Steel Limited
Private Bag 92 121, Auckland
Telephone: 0-9-375 8999
Facsimile: 0-9-375 8213
Free Phone: 0800 100 523
Email Address: info@colorsteel.co.nz
<http://www.colorsteel.co.nz>

Zincalume®

ZINCALUME® is a registered trademark.

GALVSTEEL™

GALVSTEEL™ is a trademark of New Zealand Steel Limited.

NOTE: With New Zealand Steel Limited's commitment to continuous improvement, information provided in this publication may be subject to modification. At the time of publication we believe the information contained in this document is the best available. Nonetheless, we reserve the right to modify any product, technique, equipment or statement to reflect improvements in the manufacture and application of coil coated products.

The information is supplied without prejudice to New Zealand Steel Limited's standard terms and conditions of sale. In the event of any conflict between this information and the standard terms and conditions, the standard terms and conditions shall prevail.

Copyright© 2003 New Zealand Steel Limited.

COLORSTEEL® Maxx™
COLOUR FOR THE EXTREME

MAXX™ is a trademark of New Zealand Steel Limited.

COLORSTEEL® Endura™
COLOUR FOR THE FUTURE

ENDURA™ is a trademark of New Zealand Steel Limited.

COLORSTEEL®

COLORSTEEL® is a registered trademark of New Zealand Steel Limited.

THE ROOF OF NEW ZEALAND®
is a registered trademark of New Zealand Steel Limited.

