

# HA1 FLOOR PLATE

## Hot-Rolled – Floor Plate

Revision: 31/1/2012

### GENERAL DESCRIPTION

Commercial grade Floor Plate without guaranteed mechanical properties suitable for simple forming and bending operations.

### APPLICATIONS

- Steps
- Treads
- Flooring

### STANDARDS

- AS/NZS 1594:2002
- AS/NZS 1365:1996

CHEMICAL COMPOSITION	TYPICAL (wt %)	EXPECTED MAXIMUM (wt %) <sup>[1]</sup>
Carbon (C)	0.05	0.13
Silicon (Si)	0.007	0.03
Manganese (Mn)	0.20	0.500
Sulphur (S)	0.018	0.030
Phosphorus (P)	0.011	0.040

<sup>[1]</sup> Values shown refer to relevant Australian/ New Zealand standard unless tighter internal limits are applied.


MECHANICAL PROPERTIES
Not applicable

STANDARD PLATE SIZES	
THICKNESS (mm)	
3	1220 x 2400
4 – 10	1220 x 2400 1520 x 3600

FABRICATING PERFORMANCE	
1 = Limited 5 = Excellent	
METHOD	RATING
Bending	3
Welding	5

DIMENSION CAPABILITIES	
THICKNESS (mm)	WIDTH (mm)
2.80 – 3.20	730 – 1240
3.21 – 5.00	730 – 1540
5.01 – 10.00	730 – 1540

These dimensions are a reflection of technical capability to produce. Supply conditions may be subject to dimensional restrictions and is subject to New Zealand Steel Marketing confirmation. Other dimensional combinations may be available by enquiry.

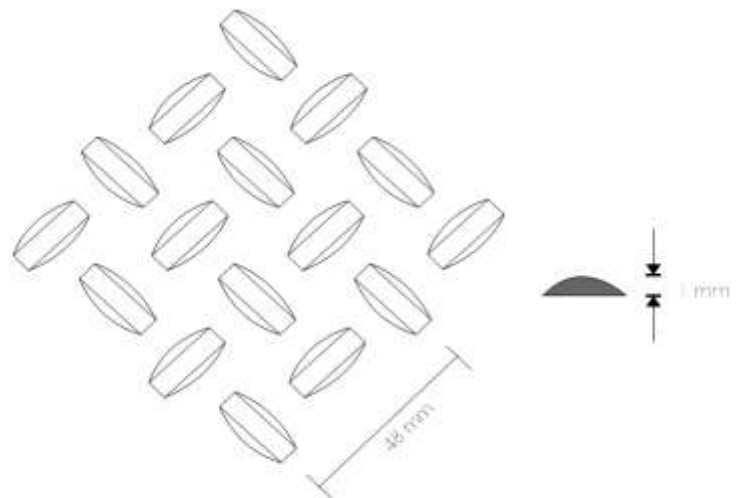

## New Zealand Steel Limited

**Auckland**  
Tel. +64 9 375 8999  
Fax. +64 9 375 8213  
A BlueScope Steel Company